


NEPTUNE NPT-1011

COMPACT CELL SITE ROUTER AND IP/MPLS L3 CPE




NPT-1011, the recent addition to ECI's Neptune (NPT) product line, is optimized for customer premise and service provider demarcation points, and for business and mobile backhauling services. Measuring just 1RU in height, NPT™-1011 offers up to 6 Gbps in capacity, enabling smooth transition from TDM to packet by supporting both packet (Ethernet, IP/MPLS and L3) and TDM services, via CES. The Neptune product line streamlines end-to-end metro service delivery by combining carrier-grade service assurance, visibility, and control with packet efficiency and multiservice support. Neptune offers a powerful, flexible, and efficient E2E metro solution for high-performance services through convergence of Ethernet (MEF CE2.0 certified), MPLS-TP, IP/MPLS, OTN, WDM, and TDM. Neptune also supports NFV services and SDN applications, which are compulsory in today's challenging metro environment.

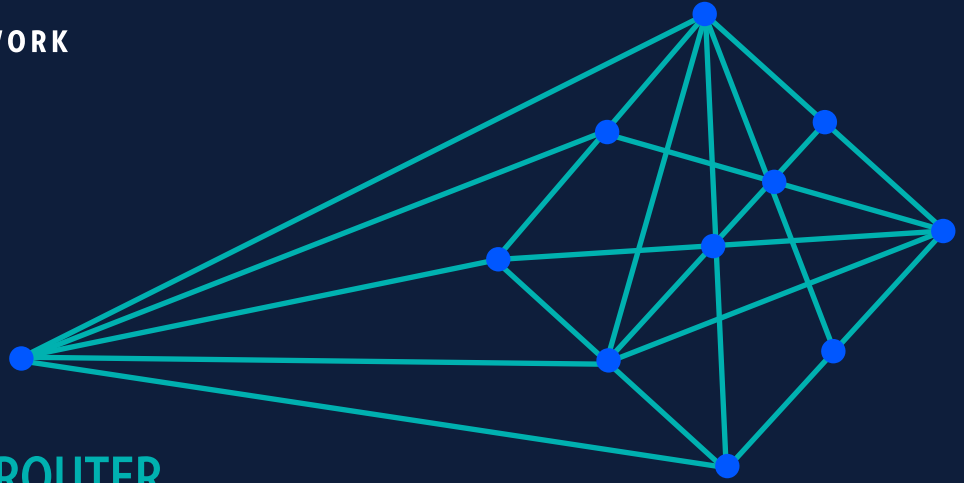

With a rich and robust feature set, NPT-1011 is well-suited for a wide variety of applications and networking scenarios. These include mobile backhaul, wholesale services, residential multiplay, and business VPN connectivity services. Like all of ECI's transport products, NPT-1011 is managed by the unified multilayer LightSOFT® NMS.

<p>Unmatched multiservice TDM, Ethernet, IP/MPLS, L3</p>	<p>Fully-managed CPE</p>	<p>Carrier-grade service assurance</p>	<p>Cost optimized compact and customized</p>
---------------------------------------------------------------------	---------------------------------	-----------------------------------------------	---------------------------------------------------------

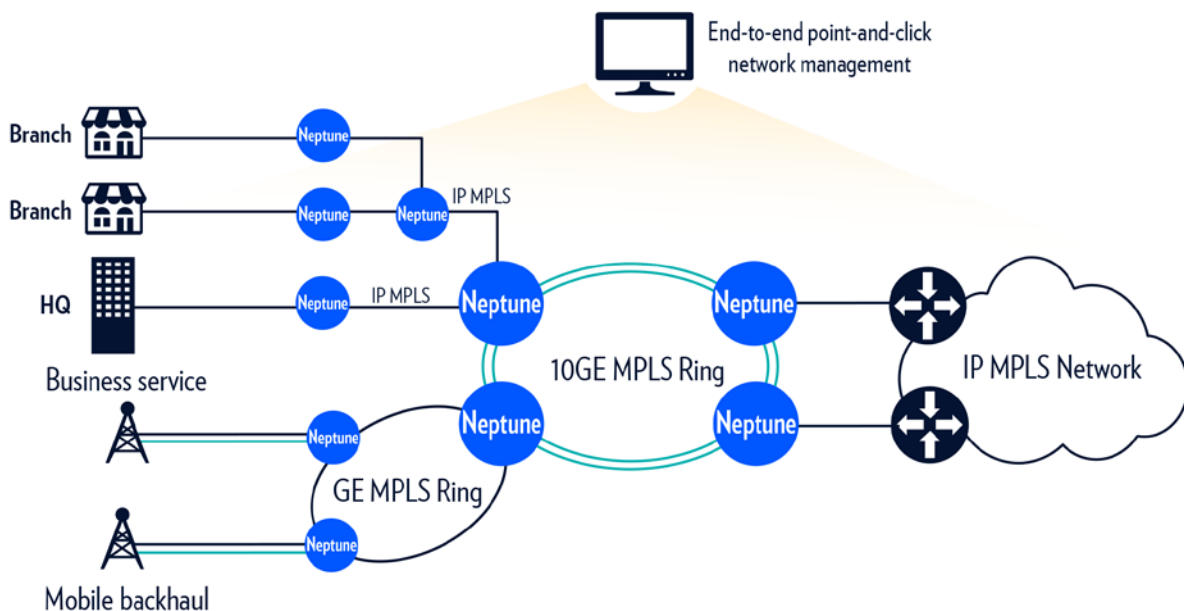

Technical specifications

Packet	Switch: 6 Gbps Services: MEF CE2.0 (E-Line, E-LAN, E-Tree, E-Access) PN- and VPN-based Ethernet and IP, MPLS-TP, IP/MPLS MPLS VPWS, VPLS, L3VPN, LDP for LSP/PW Max. interfaces: 2 x 10/100/1000BaseX + 4 x GE combo ports
TDM	Services: CES (SATO, CESoPSN) Max. CES interfaces: 4 x E1
WDM	CWDM, DWDM
Timing and Synchronization	SyncE according to ITU-T G.8261/G.8262, 1588v2, SNTP and NTP
Protection , restoration and High availability	HW redundancy for power supply units G.8031 ELPS , G.8032 Ethernet Ring Protection (ERP), 1:1 Linear protection, PW Redundancy (PWR), IEEE 802.3ad Ethernet Link Aggregation(LAG) with LACP, VRRP Supports graceful restart on OSPF, BGP
OAM	Ethernet OAM (IEEE802.3ah ,IEEE 802.1ag and ITU-T Y.1731 PM), MPLS-TP OAM (G8113.1)(CC/LB/ LT/AIS/RDI/APS/LM/DM/CSF), RFC 2544 Generator, Y.1564 -Ethernet service activation (SLA), IP and MPLS OAM (IPv4 Ping, IPv4 Traceroute, LSP Ping/PW Ping/Tunnel , LSP Traceroute/PW Traceroute/ Tunnel Traceroute/L3VPN TraceroutePing/L3VPN Ping, BFD for OSPF/VRRP, BFD for PW/Static LSP/ LDP LSP/CR-LSP/Tunnel/IP
Traffic management	Traffic classification (based on Port, VLAN, Port+VLAN, IEEE 802.1p, and DSCP), Diffserv-based TM, 8 Classes of Service (CoSs), Rewriting of 802.1p CoS/DSCP per EVC
Topologies	Mesh, dual homing, multi-ring, ring, star, linear
Security	RADIUS (client authentication), SSHv2, Access Control List (ACL), Port isolation, CPU rate limit protection
Management	LightSOFT® NMS, SNMPv2/v3, CLI, syslog, Muse™
Pluggable SFP support	Electrical, colored C/DWDM, non-colored bidirectional SFPs
Power input	-36 VDC to -72 VDC, 100 VAC to 240 VAC
Power dissipation	Maximum ≤25W
Operating temperature range	-10°C to +65°C (-23°F to 149°F)
Operating RH range	10% to 90%
Environmental standards	NEBS –GR-63 Core, GR-1089 Core, ETS 300 019-1-3 Class 3.3, ETS 300 019-2-3 Class 3.3, utility substations), EN 61000-6-5 (Immunity for substations)
Safety	EN60950-1
EMC	EN 300 386, EN 55022, EN 55024, EN 61000
Physical dimensions	H x W x D: 1.7" x 8.7" x 7.1" / 44 x 220 x 180 mm

Specifications subject to change without notice

Contact us to find out how our ELASTIC networks can help your business grow



ABOUT ECI

ECI is a global provider of ELASTIC network solutions to CSPs, utilities as well as data center operators. Along with its long-standing, industry-proven packet-optical transport, ECI offers a variety of SDN/NFV applications, end-to-end network management, a comprehensive cyber security solution, and a range of professional services. ECI's ELASTIC solutions ensure open, future-proof, and secure communications. With ECI, customers have the luxury of choosing a network that can be tailor-made to their needs today – while being flexible enough to evolve with the changing needs of tomorrow. For more information, visit us at www.ecitele.com